

10'512.735

Rec'd PCT/PTO 27 OCT 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 November 2003 (13.11.2003)


PCT

(10) International Publication Number
WO 03/094346 A1

- (51) International Patent Classification⁷: **H03H 7/46**
- (21) International Application Number: **PCT/IB03/01704**
- (22) International Filing Date: **25 April 2003 (25.04.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
0209959.6 **1 May 2002 (01.05.2002)** **GB**
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BOYLE, Kevin, R.** [GB/GB]; c/o Philips Intellectual Property & Standards, Cross Oak Lane, Redhill, Surrey RH1 5HA (GB).
- (74) Agent: **WHITE, Andrew**; Philips Intellectual Property & Standards, Cross Oak Lane, Redhill, Surrey RH1 5HA (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: IMPROVEMENTS IN OR RELATING TO WIRELESS TERMINALS

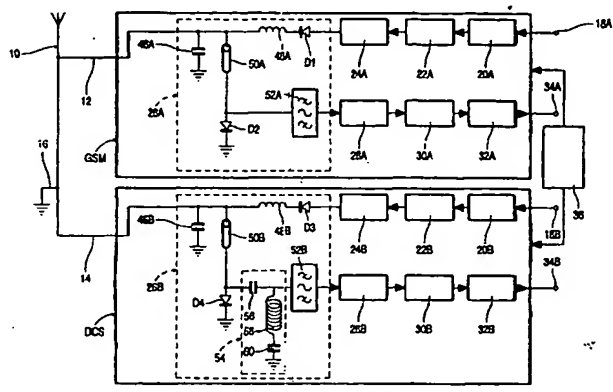

WO 03/094346 A1

(57) Abstract: A wireless terminal having a dual band antenna arrangement which comprises a planar inverted-F antenna (10) having a first feed (12) for signals in a first, lower frequency band, for example the GSM band, a second feed (14) for signals in a second, higher frequency band, for example the DCS band, and a ground pin (16). A first coupling stage (26A) couples the transmit and receive paths of a first transceiver (GSM) to the first feed and a second coupling stage (26B) couples the transmit and receive paths of a second transceiver (DCS) to the second feed. Each of the first and second coupling stages comprise a quarter wavelength transmission line (50A, 50B) having a first end coupled to the respective transmit signal path and a second end coupled by band pass filter (52A, 52B) to the respective receive signal path. A first PIN diode (D1, D3) couples a transmit signal path to the first end of the respective quarter wavelength transmission line and to the respective feed (12, 14) and a second PIN diode (D2, D4) couples the second end of the respective quarter wavelength transmission line to ground. In operation when transmitting in one of the bands, the first and second PIN diodes of the relevant coupling stage are switched-on, whilst the PIN diodes in the other coupling stage are off and when in a receiving mode all the PIN diodes are off. The signal being received by one of the transceivers is reflected by the band pass filter in the coupling stage of the other transceiver.